

# FASTERHOLT


## MiniMobil 32



Fasterholt Maskinfabrik · Ejstrupvej 22 · Fasterholt  
DK-7330 Brande · Tel. +45 9718 8066  
[www.fasterholt.dk](http://www.fasterholt.dk)



1

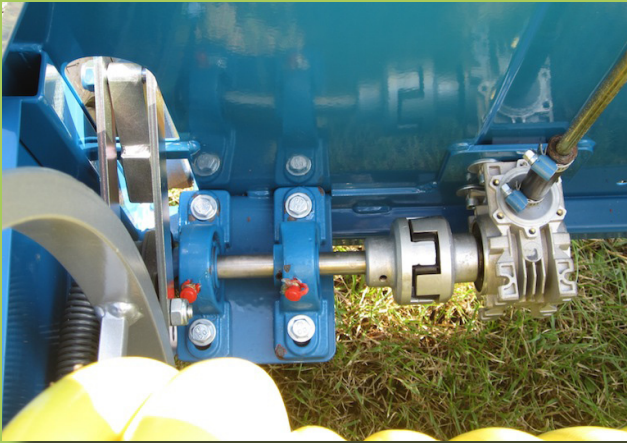

4



2



5



3



1. Here is the bevel gear, the drive shaft of the rotor and the clutch, which transmits the drive to the belt and the pulley for pulling the hose.
2. At the rear end of the machine is the drawbar to pull out the machine and the clutch lever, which is used for disconnecting and coupling.
3. The tap for speed control can also be used as stop tap, if the machine should stand still and irrigate.
4. To the left is the automatic stop valve for propulsion. Also displayed is the small 1/2" sprinkler with tap to supplementary irrigation from the rotor.
5. The draw bar follows the hose as it is laid out. Please note the release clamp for end stop. (Draw wire)

#### **Technical data for MiniMobil 32:**

Length with lifted draw bar:	122.0 cm
Height:	105.0 cm
Width:	80.0 cm
	Width shield ring: 120.0 cm
Size of wheels:	rear wheel: 480/400-8
	front wheel: 300-4
Length of hose:	50 m
Ø:	1" (int. measures)

#### **Dealer:**

#### **Manufacturer:**

Fasterholt Maskinfabrik A/S · DK-7330 Brande · Tel. +45 9718 8066  
[www.fasterholt.dk](http://www.fasterholt.dk)