FASTERHOLT

MiniMobil 40

Fasterholt Maskinfabrik · Ejstrupvej 22 · Fasterholt
DK-7330 Brande · Tel. +45 9718 8066
www.fasterholt.dk

1

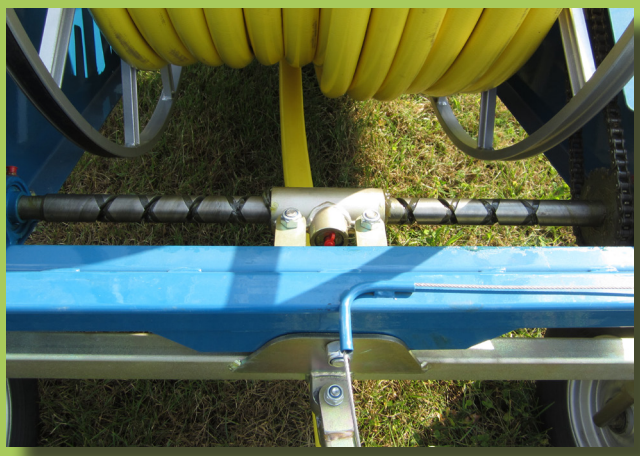

2

3

4

5

1. Mini Mobil 40 is equipped with cross-track axle to the hose guide, which results in precise placement of the hose.

2. To the left you see the valve to an automatically stop of the machine. It also shows the hydrant and sprinkler for supplementary irrigation with rotor. At the top of the picture is the valve that controls the speed of the machine.

3. The coupling lever is used for the operation and unrolling of the hose. The drawbar is used to retracting the machine.

4. Here is the water supply to the drum and pressure gauge for reading the pressure.

5. This is the bevel gear with drive shaft for rotor and coupling for belt drive to hose reel.

Technical data for MiniMobil 40:

Length with lifted draw bar:		195.0 cm
Height with rotor:		200.0 cm
Width:		104.0 cm
Size of wheels:	rear wheel:	480/400-8
	front wheel:	500-8
Length of hose:		125 m
Ø:		40 mm (soft)

Stop for over pressure.

Dealer:

Manufacturer:
Fasterholt Maskinfabik A/S · DK-7330 Brande · Tel. +45 9718 8066
www.fasterholt.dk